

FEEL THE HEAT!

Harness Anchor for Polaris RZR 4 Seat
 Part # **14-0001** RZR XP4 900 & XP4 1000 Black

Congratulation on the purchase of the DragonFire Harness Anchor for Polaris RZR 4 Seat. This product was designed specifically to allow aftermarket 4-point and 5-point harnesses to be installed with the factory Polaris seats and keep the shoulder straps from sliding off the corners of the seat. This provides greater security and comfort for the occupants without having to break the bank by purchasing new seats to accommodate harnesses. Be sure to check out the full line of DragonFire Accessories for your vehicle at your local authorized dealer or online at <http://www.DragonFireRacing.com>

- **Not recommended for aftermarket seats.**
- **DragonFire Harness OverRide Clip P/N: 14-2030 and Safe Mode Switch P/N 11-0014 are sold separately.**

! WARNING

- Read and understand these instructions before installing product
- This product does not provide roll over protection
- Ensure harnesses are installed properly per manufacturer's specifications
- Improper installation may result in harness failure and injuries
- Do not use product if there are any signs of damage

Pre-installation: Lay out components and compare to list and images.

Part & Hardware List


ITEM	QTY	SIZE	LENGTH	TYPE	STEP USED
P1	1	-	-	Harness Bracket	2
P2	1	-	-	Tube Clamp Half	2
P3	2	7/16"-20	23mm	Eyelet Bolt	5
P4	2	-	-	3" Snap Hook	8
P5	2	7/16"	-	Flat Washer - Yellow Zinc	5
P6	2	7/16"-20	-	Nylon Locknut - Yellow Zinc	5
P7	6	#10-32	3/4"	Socket Head Cap Screw	2

Disclaimer

Off road activities can be hazardous and could lead to injury, dismemberment, paralysis and death. No warranty of representation is made as to the products ability to protect the user from any injury or death. The user assumes that risk. The acceptance and /or use of this merchandise purchased from DragonFire by the customer hereby shall release DragonFire from any and all liability pertaining to the use of such merchandise.

Tools Required

5/32" Allen
11/16" Wrench
Ratchet
Adjustable Pliers

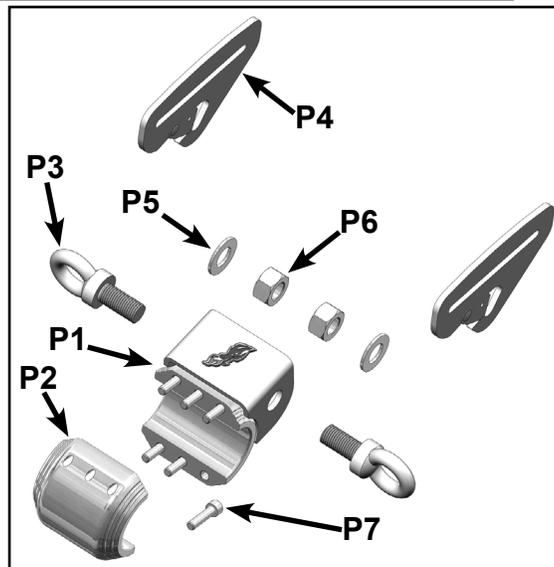


Step 1: Place vehicle on a flat and level surface. Place gear selector in "Park" and remove keys from the ignition.

Step 2: Obtain Harness Bracket [P1], Tube Clamp Half [P2], and Socket Head Screw [P3]. Loosely install components to the bar behind the front seat of vehicle (Figure A).

Step 3: Center Harness Anchor behind seat and note location (Figure B).

Step 4: For the following steps, remove seat from vehicle for ease of installation if necessary. Rotate the Harness Anchor so that the **DragonFire Logo facing up toward the roof or sky** (Figure C). Tighten and torque clamp hardware to 5 ft-lbs.


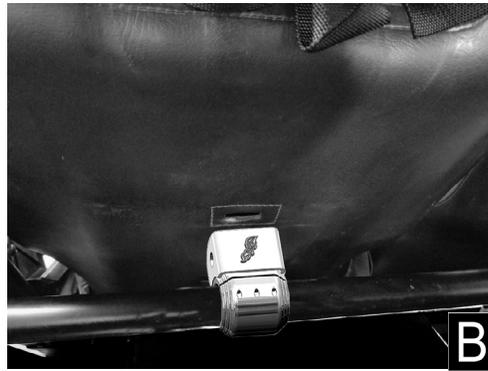


Step 5: Obtain Eyelet bolt [P3], washer [P5], and locknut [P6]. Place Eyelet Bolt [P3] through hole in bracket and then install with hardware (Figure D).

Step 6: Repeat Step 5 with the second sets of Eyelet Bolt and hardware (Figure E). Ensure Eyelet bolts are parallel to the DragonFire Head logo; torque eyelet bolt to 45 ft-lbs.

Step 7: Reinstall the seat if seat was removed in previous step.

Step 8: Loop the harness shoulder straps through the quick release snap hooks [P4] and then attach the snap hooks to the Eyelet bolts (Figure F).

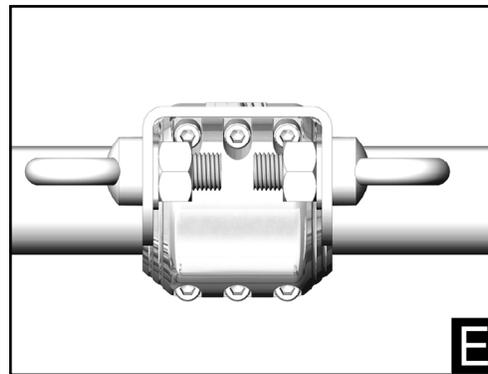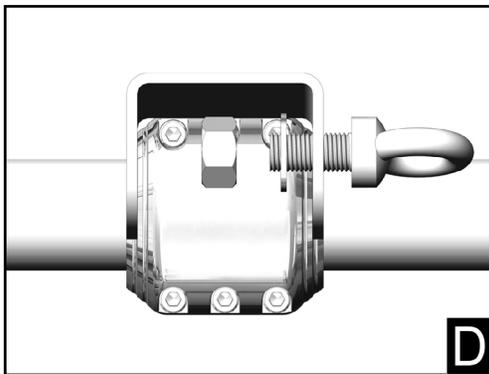

Step 9: This completes installation. Time to ride and enjoy!

ProTip: Periodically check all hardware and re-tighten if needed.

For further assistance please contact us at customerservice@dragonfireracing.com or 1-800-708-9803.