

STORM OIL TANK UPDATE KIT PN 2200526



Before you begin, read these instructions and check to be sure all parts and tools are accounted for.

Please retain these installation instructions for future reference and parts ordering information.

The contents of this kit include:

<u>Qty.</u>	<u>Part Description</u>	<u>Part No.</u>
1	Decal, Low Oil Level	7074664
1	Fitting	7052110
1	Hose	5410902
1	Clamp	7080003
1	Clamp	7080544
1	Instructions	9912826

You will need to supply:

Standard Wrench Set

Pliers


Phillips Screwdriver Set

IMPORTANT: Perform all items correctly and completely.

INSTALLATION INSTRUCTIONS

1. Remove seat to access oil tank.
2. Apply low oil level decal (PN 7074664) as shown above low oil line.
3. Replace production oil tank outlet fitting (PN 7052042) with 3/8" I.D. outlet fitting (PN 7052110).
4. Remove oil line between outlet fitting (PN 7052110) and oil filter.
5. Install new hose (PN 5410902) and secure with one clamp (PN 7080003) and one clamp (PN 7080544).

NOTE: Check for kinked oil lines between oil injector pump and check valves at the time these new parts are being installed.

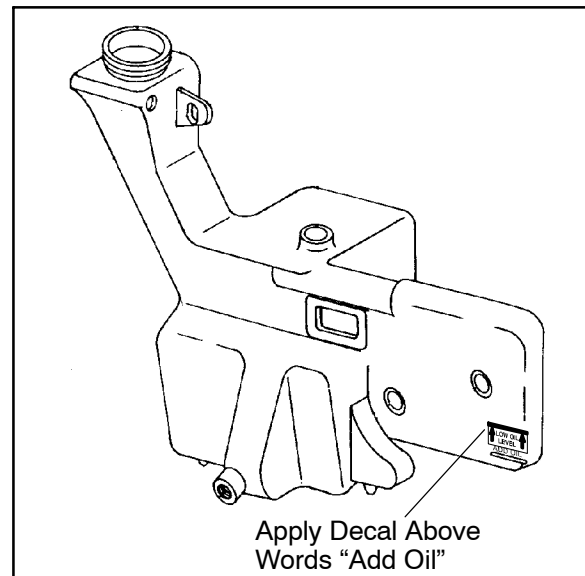

Instruction PN 9912826 Rev 02 6/94

Printed in U.S.A.