



INSTALLATION INSTRUCTIONS

Rear Facing Light Mount Kit: LB-P-RAN1K (also for Ranger 900 and Ranger SP570)

- ⚙ Please look through and read these instructions BEFORE starting so you understand what processes you'll be doing, and possible extra tools you may need.
- ⚙ Do Not discard product packaging until installation is complete and functioning properly.

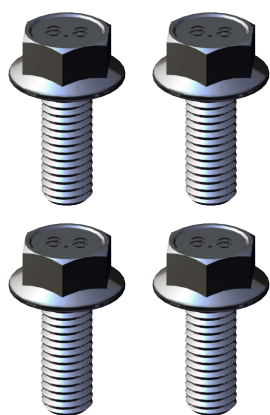

**M8x20
Hex Flanged
(4pcs)**

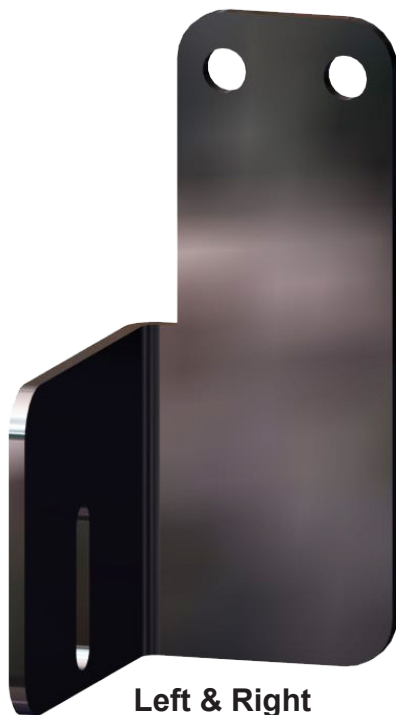

**Left & Right
Mounting
Brackets
(2pcs)**



**Left & Right
Bracket
Retainers
(2pcs)**



1. The first thing you need to do is locate the **Mounting Bracket** and **Bracket Retainer** provided in your kit for one side, and **Two (2)** of the **M8x20 Hex Flanged Bolts** also provided in your kit. See **Fig.1a**. Then insert the **Bracket Retainer** inside the frame bracket with the flat side of the Bracket Retainer flush up against the frame bracket as shown in **Fig1b**.

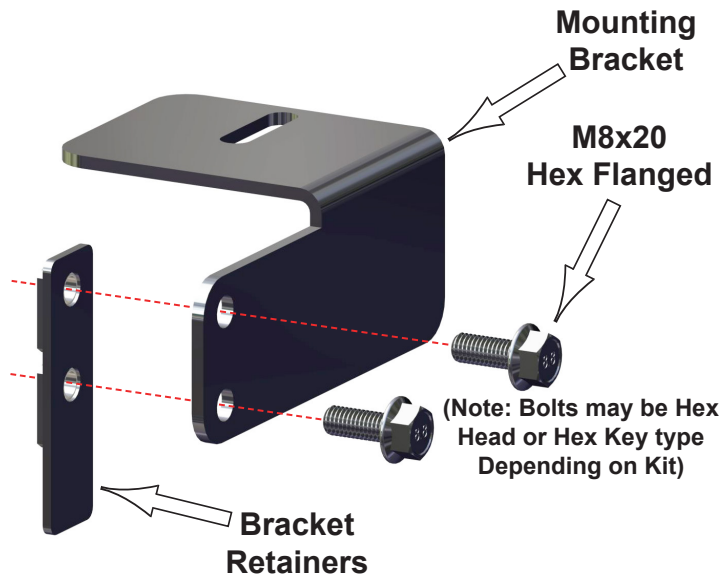


Fig.1a

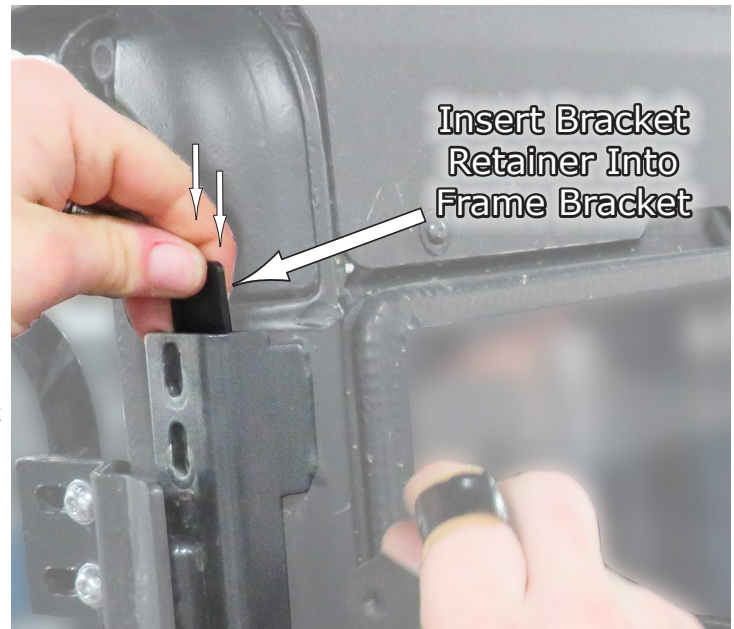


Fig.1b

2. Then install the **Mounting Bracket** to the frame using the **M8x20 Hex Flanged Bolts** going through the **Mounting Bracket**, **Frame Bracket** and threading into the **Bracket Retainer** (that you slid down inside the frame bracket previously), as shown in **Fig.2a**, and tighten secure. We are also showing the **Mounting Bracket** with a light installed (not in your kit) to show you how it works together with a light. **Fig.2b** shows the **Bracket** installed complete. Repeat these same procedures for opposite side of vehicle.



Fig.2a



Fig.2b

INSTALLATION FOR RANGER 900

3. The installation for the 900 is pretty much the same as the previous install shown with a few differences we will show you. Start by inserting the **Bracket Retainer** up into the **Frame Bracket** as shown in **Fig.3a** making sure you have the **Flat Side** of the **Retainer** flush against the inside of the frame bracket as shown in **Fig.3b**.

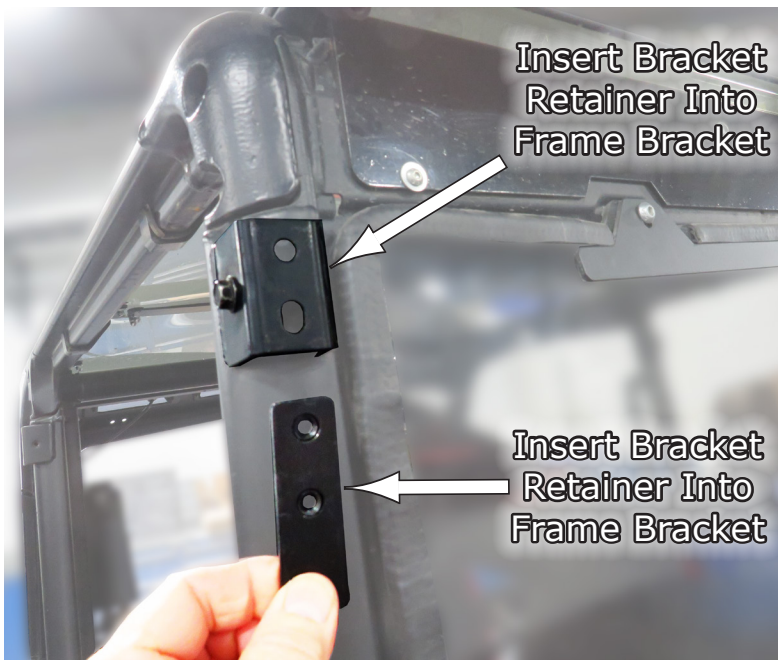


Fig.3a



Fig.3b



4. Then while holding the **Retainer** in place, take the **Mounting Bracket** and attach it to the vehicle using the **M8x20 Hex Flanged Bolts** from your kit as shown in **Fig.4a-b**. Tighten Secure.
(*Note: We are also showing the Mounting Bracket with a light installed (not in your kit) to show you how it works together with a light*)

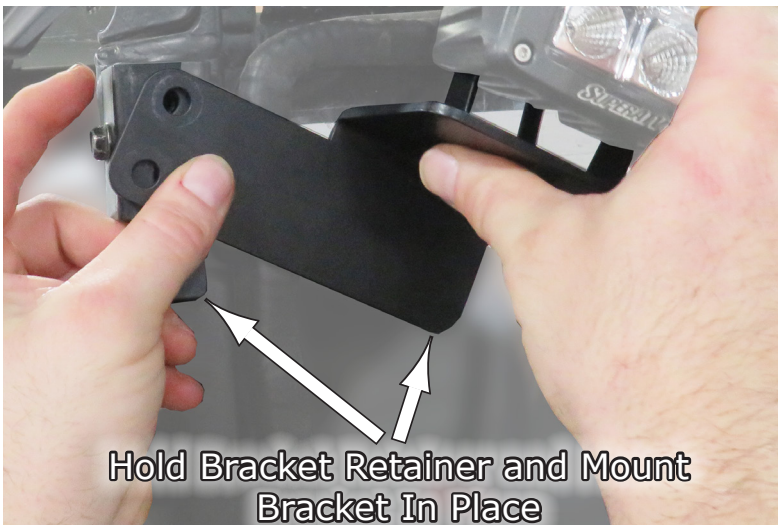


Fig.4a


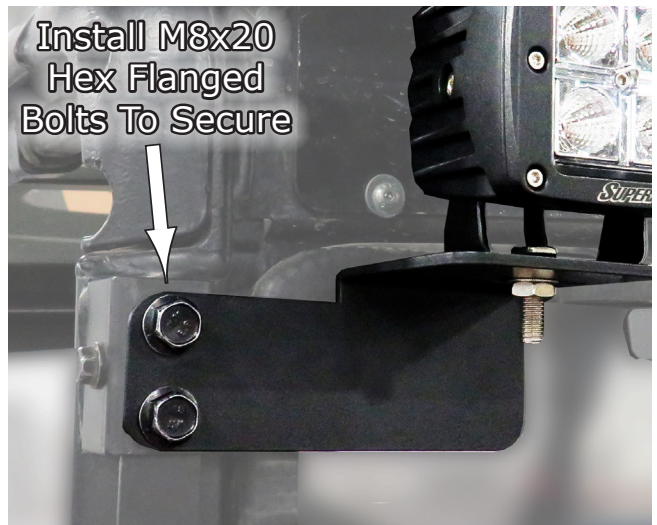


Fig.4b

INSTALLATION FOR RANGER SP570

5. The installation for the **SP570** is also pretty much the same as the previous model installs shown here previously, with some differences. Start by inserting the **Bracket Retainer** up into the **Frame Bracket** as shown in **Fig.5** making sure you have the **Flat Side** of the **Retainer** flush against the inside of the **Frame Bracket** as shown in **Fig.5**. Then align the **Mounting Bracket** holes up with the hole in the **Frame Bracket** and **Mount Bracket Retainer** and install the **M8x20 Hex Flanged Bolts** as shown in **Fig.5** Tighten Secure.

(Note: We are also showing the Mounting Bracket with a light installed (not in your kit) to show you how it works together with a light)

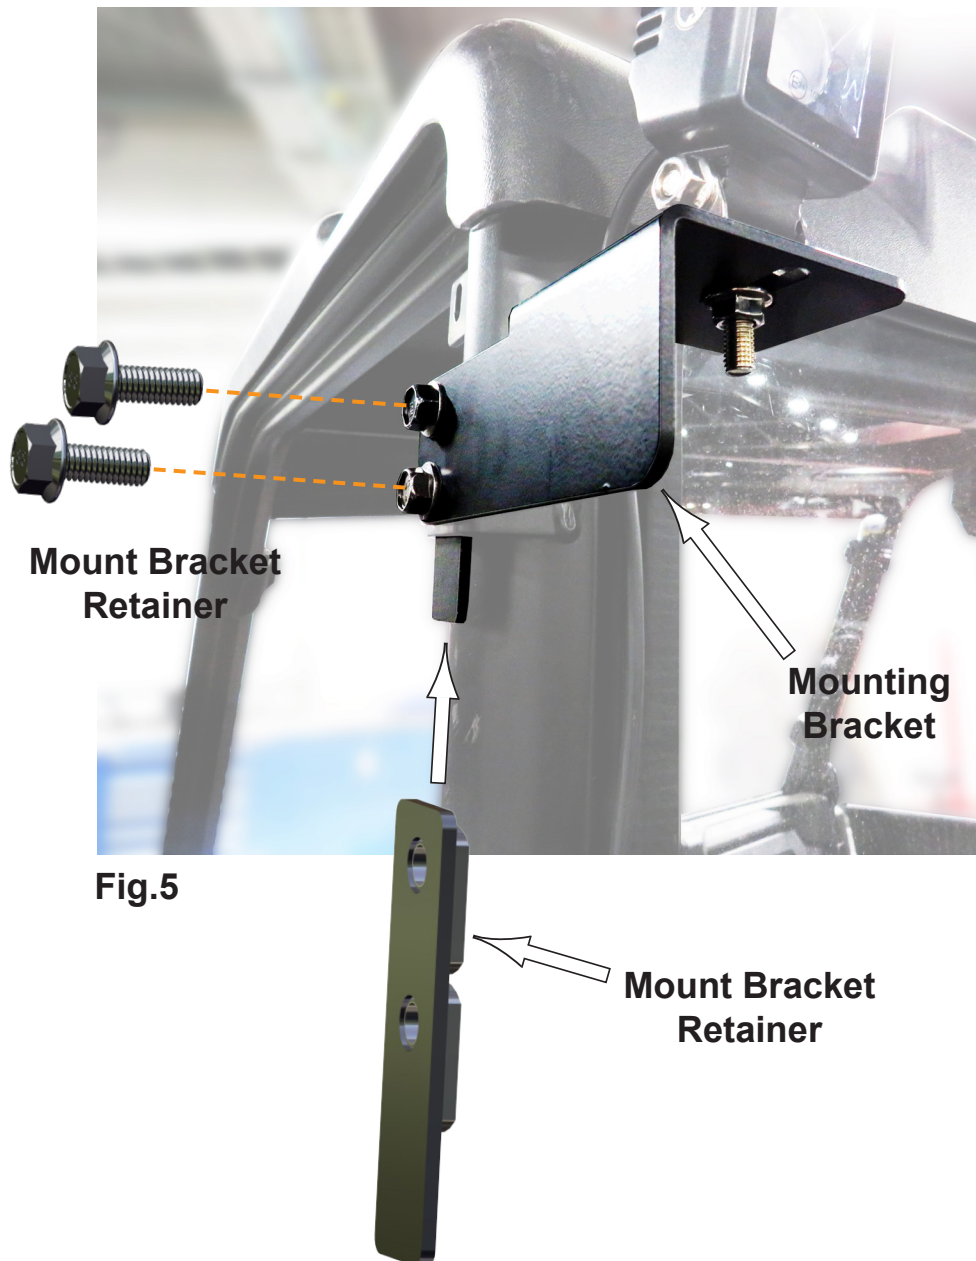



Liability Statement

SuperATV's® products are designed to best fit user's ATV/UTV under stock conditions. Adding, modifying, or fabricating any factory or aftermarket parts will void any warranty provided by SuperATV® and is not recommended. SuperATV's® products could interfere with other aftermarket accessories. If user has aftermarket products on machine, contact SuperATV® to verify that they will work together.

Although SuperATV® has thousands of satisfied customers, user should be aware that installing lift kits, long travel, or suspension kits, tires, etc. will change the ride of machine and may increase maintenance and part wear. Operating any off-road machine while, or after, consuming alcohol and/or drugs increases risk of bodily harm or death. No warranty or representation is made as to this product's ability to protect user from severe injury or death. SuperATV® urges operators and occupants to wear a helmet and appropriate riding gear at all times.

By purchasing and installing SuperATV® products, user agrees that should damages occur, SuperATV® will not be held responsible for loss of time, use, labor fees, replacement parts, or freight charges. SuperATV®, nor any 3rd party, will not be held responsible for any direct, indirect, incidental, special, or consequential damages that result from any product purchased from SuperATV®. The total liability of seller to user for all damages, losses, and causes of action, if any, shall not exceed the total purchase price paid for the product that gave rise to the claim.

SuperATV® will warranty only parts provided by SuperATV®. Any damage or problems with OEM housings, bearings, seals, or other manufacturers' products will not be covered by SuperATV®. SuperATV® parts and products are not warrantied if item was not installed properly, misused, or modified.

Installing, adding, modifying, or fabricating any factory or aftermarket product to your ATV/UTV may violate certain local, state, and federal laws. Be advised that laws vary depending on town, city, county, state, etc. Use of certain products on public streets, roads, or highways may be in violation law. The Buyer is solely and exclusively legally and personally responsible for any violation of the law by the installation or use of the product. You must abide by all local, state, and federal laws, including but not limited to vehicle safety, traffic laws, and ordinances. It is your responsibility to know the laws and how they apply to you.

The Buyer is responsible to fully understand the capability and limitations of his/her vehicle according to manufacturer specifications, warnings and instructions and agrees to hold SuperATV® harmless from any damage resulting from failure to adhere to such specifications, warnings and/ or instructions. The Buyer is also responsible to obey all applicable federal, state, and local laws and ordinances when operating his/her vehicle while using this product, and the Buyer agrees to hold SuperATV® harmless from any violation thereof.

If you have any problems/questions on this kit, contact us by email
at Superatv.com.

Need help with your installation?



sales@superatv.com



www.superatv.com



1-855-743-3427



8:00am - 9:00pm EST M-Th
8:00am - 7:00pm EST Friday
9:00am - 2:00pm EST Saturday

*Thank You
For Choosing*



Like SuperATV on Facebook to keep up to date on new products!