



SSV WORKS, 201 N. Rice Ave Unit A, Oxnard, CA 93030  
www.SSVworks.com | Phone: 818-991-1778 | Fax: 866-293-6751

## X3-DF4

2017+ Can-Am Maverick x3 & x3 Max  
4" Speaker Door Pods

### WARRANTY INFORMATION:

All SSV Works enclosures are covered by a limited lifetime warranty against defects in material or workmanship. All SSV Works Electronics are covered by a limited 1 year warranty against defects in material or workmanship. All SSV Works Speakers are covered by a limited 1 year warranty against defects in material or workmanship. Labor for replacement of defective components is not covered. Contact SSV Works for further warranty information.



Please read and understand these instructions completely before installation to avoid possible injury, or damage to the accessory or vehicle.


### TOOLS NEEDED FOR INSTALLATION

- T-30 Torx Driver


### PARTS LIST

1. X3-DF4 Enclosures (1 pair)
2. Spacer Washers x 2

### PARTS LIST IMAGES

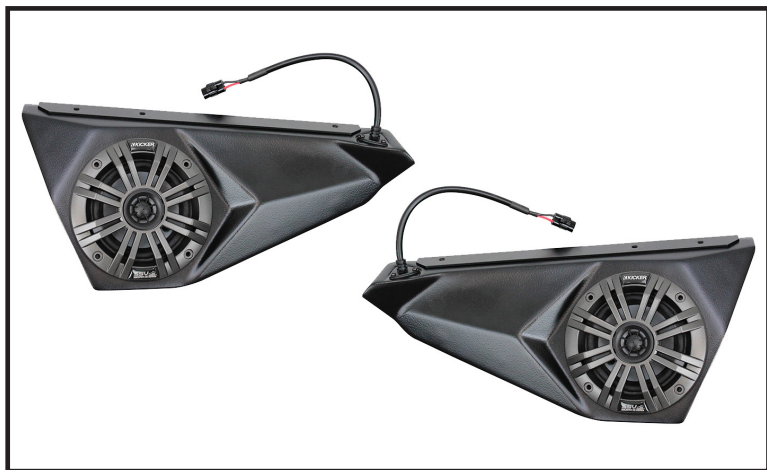


1. X3-DF4 Enclosures (1 pair)

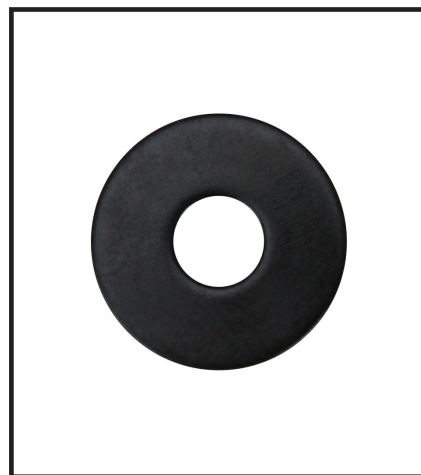

2. Spacer Washers x 2



A. Remove plastic covers by unscrewing (2) T30 Torx

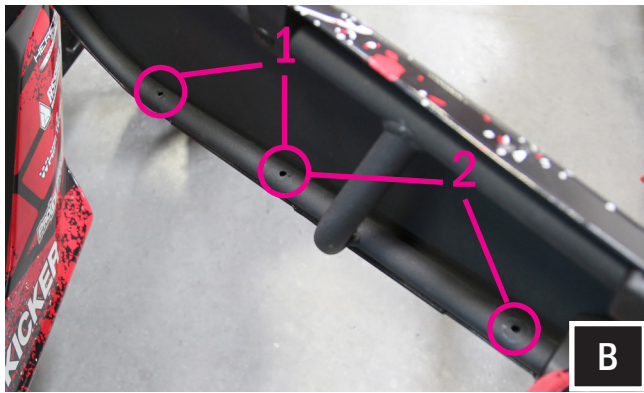

**B.** You will have two options for mounting  
 Option 1= mounting without factory door add on  
 Option 2= mounting with factory door add on



**C.** Using the factory T-30 torx screws, insert on to door hole opening and line up X3-DF4 enclosure to proper location.



**D.** The front screw of enclosure will need the supplied washer to balance the pod correctly.



**E.** Tighten screws with T30 torx driver.



mounted without lower door



mounted with lower door

**F.** Route the speaker wire away from any moving parts and any sharp metal, then connect to the amplifier.  
 Connecting the X3-DF4 using the pre-installed, two-pin connector will require an optional SSV Works plug-&-play harness (B-H1150 - sold separately). If you are not using the B-H1150 harness, simply cut off the two-pin connector and follow the wiring instruction below.

## WIRING INSTRUCTIONS

For proper sound, ensure the speaker polarity is correct connect the "+" to the "+" and the "-" to the "-" from the speaker wire to the amplifier. If using with an SSV Works complete system refer to the amplifier wiring instructions for more detailed wiring information.

